

## PRODUCT DATA SHEET

Standing: 2024-03-21

LAUDA Proline PJL 12 C

Calibration ther. 200 V; 50/60 Hz

Part Number: L001954

### Features

- Calibration thermostatic bath with latest microprocessor technology and many functions for programming and information and installed cooling coil
- Back-lit graphic LCD display with high resolution and different display modes
- Additional green LED display for temperature
- Input either via cursor keys, numeric soft keys or both. Additional Tmax key for overtemperature
- Command console can be detached and used as remote control
- EasyUse system for simple operation of the whole unit
- SelfCheck Assistant for system diagnosis
- Fully electronic continuous controller with PID action for internal & external control
- PowerAdapt system for the use of the maximum possible amount of heat permitted by the power supply system
- Low-level and adjustable over-temperature protection with acoustic alarm for use with flammable and non-flammable liquids
- LAUDA Varioflex pump (pressure) with 8 selectable levels
- Optically decoupled RS 232/485 interface integrated as a standard
- Option for upgrading with up to 2 interfaces (RS 232/485, Profibus, analogue or contact modules, Ethernet-USB module)
- Programmer with 150 temperature/time segments that can be separated into 5 programs
- Timer function for switching on the thermostat, entering the standby mode or running of programs
- 2-chamber construction for constant level in the thermostating chamber
- Pump connectors on the side and in the back, installed bypass
- Bath from stainless steel (specially insulated for low-temperature work, with carrying handles and drain tap)
- For low temperatures an external cooling source is required



Working temperature min.  
30 °C



Working temperature max.  
200 °C

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Ralf Hermann, Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser

## PRODUCT DATA SHEET

Standing: 2024-03-21

LAUDA Proline P JL 12 C  
 Calibration ther. 200 V; 50/60 Hz  
 Part Number: L001954

### Technical Features (according to DIN 12876)

|   |                                   |
|---|-----------------------------------|
| Working temperature range                       | 30 ... 200 °C                     |
| Working temperature range with external cooling | 20 ... 200 °C                     |
| Operating temperature range                     | -40 ... 200 °C                    |
| Ambient temperature range                       | 5 ... 40 °C                       |
| Temperature stability                           | 0.01 ± K                          |
| Heater power max.                               | 2.7 kW                            |
| Current max.                                    | 15 A                              |
| Power consumption max.                          | 2.9 kW                            |
| Pump Pressure max.                              | 0,8 bar                           |
| Pump flow rate max. (pressure)                  | 25 L/min                          |
| Bath volume min. / max.                         | 8.5 / 13.5 L                      |
| Size of bath (ØxH)                              | 120 x 320 mm                      |
| Overall dimensions (WxDxH)                      | 220 x 360 x 630 mm                |
| Weight  | 19 kg                             |
| Power supply                                    | 200 V; 50/60 Hz                   |
| Power plug                                      | Power cord with plug (NEMA 6-20P) |

Reserve technical changes

### Standard accessories

- 1 Bath cover
- 4 screw caps, 4 closing plugs
- 2 nipples 13 mm for pump connectors
- 2 nipples for cooling coil

LAUDA DR. R. WOBSE R GMBH & CO. KG  
 Laudaplatz 1 • 97922 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0  
 info@lauda.de • www.lauda.de  
 WEEE-Reg.-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
 LAUDA DR. R. WOBSE R Verwaltungs-GmbH  
 Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRB 560226

Geschäftsführer:  
 Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
 Dr. Ralf Hermann, Dr. Marc Stricker  
 Beirat: Dr. Gerhard Wobser


## PRODUCT DATA SHEET

Standing: 2024-03-21

LAUDA Proline PJL 12 C

Calibration ther. 200 V; 50/60 Hz

Part Number: L001954

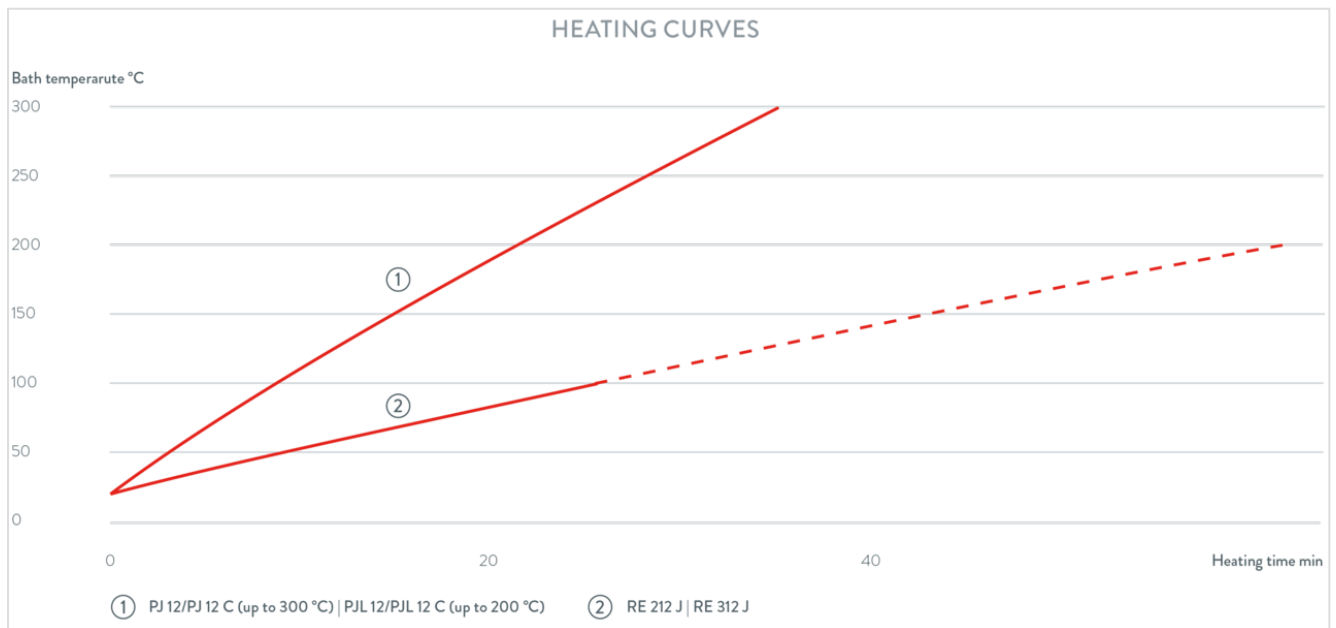

Reserve technical changes

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0  
info@lauda.de • www.lauda.de  
WEEE-Reg.-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Ralf Hermann, Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser