

## PRODUCT DATA SHEET

Standing: 2024-11-04

LAUDA Proline PVL 15  
Clear-view thermostat 115 V; 60 Hz  
Part Number: L001576

### Features

- Thermostatic bath/circulator with latest microprocessor technology and installed cooling coil
- Easily readable green LED display for temperature
- User-friendly menu guidance with simplest 3-key operation
- EasyUse system for simple operation of the whole unit
- SelfCheck Assistant for system diagnosis
- Fully electronic continuous controller with PID action for internal & external control
- PowerAdapt system for the use of the maximum possible amount of heat permitted by the power supply system
- Low-level and adjustable over-temperature protection with acoustic alarm for use with flammable and non-flammable liquids
- LAUDA Varioflex pump (pressure) with 8 selectable levels
- Option for upgrading with up to 2 interfaces (RS 232/485, Profibus, analogue or contact modules, Ethernet-USB module)
- Measuring chamber with 4 layers of special insulating glass for low temperatures down to -60 °C
- Pump connectors on the side and in the back, installed bypass
- Bath vessel made of stainless steel (insulated, with handles and drain tap)



Working temperature min.  
30 °C



Working temperature max.  
100 °C

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser

# PRODUCT DATA SHEET

Standing: 2024-11-04

LAUDA Proline PVL 15  
 Clear-view thermostat 115 V; 60 Hz  
 Part Number: L001576

## Technical Features (according to DIN 12876)

|   |                                   |
|---|-----------------------------------|
| Working temperature range                       | 30 ... 100 °C                     |
| Working temperature range with external cooling | 20 ... 100 °C                     |
| Operating temperature range                     | -60 ... 100 °C                    |
| Ambient temperature range                       | 5 ... 40 °C                       |
| Temperature stability                           | 0.01 ± K                          |
| Heater power max.                               | 1.7 kW                            |
| Current max.                                    | 16 A                              |
| Power consumption max.                          | 1.9 kW                            |
| Pump Pressure max.                              | 0,8 bar                           |
| Pump flow rate max. (pressure)                  | 25 L/min                          |
| Bath volume min. / max.                         | 11.0 / 15.0 L                     |
| Size of bath (W x D x H)                        | 230 x 135 x 320 mm                |
| Overall dimensions (WxDxH)                      | 506 x 282 x 590 mm                |
| Weight  | 35 kg                             |
| Power supply                                    | 115 V; 60 Hz                      |
| Power plug                                      | Power cord with plug (NEMA 5-20P) |

Reserve technical changes

## Standard accessories

- 4 screw caps, 4 closing plugs
- 2 nipples 13 mm for pump connectors
- 2 nipples for cooling coil

LAUDA DR. R. WOBSEY GMBH & CO. KG  
 Laudaplatz 1 • 97922 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0  
 info@lauda.de • www.lauda.de  
 WEEE-Reg.-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRA 560069


Persönlich haftende Gesellschafterin:  
 LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
 Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRB 560226

Geschäftsführer:  
 Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
 Dr. Marc Stricker  
 Beirat: Dr. Gerhard Wobser

## PRODUCT DATA SHEET

Standing: 2024-11-04

LAUDA Proline PVL 15  
 Clear-view thermostat 115 V; 60 Hz  
 Part Number: L001576

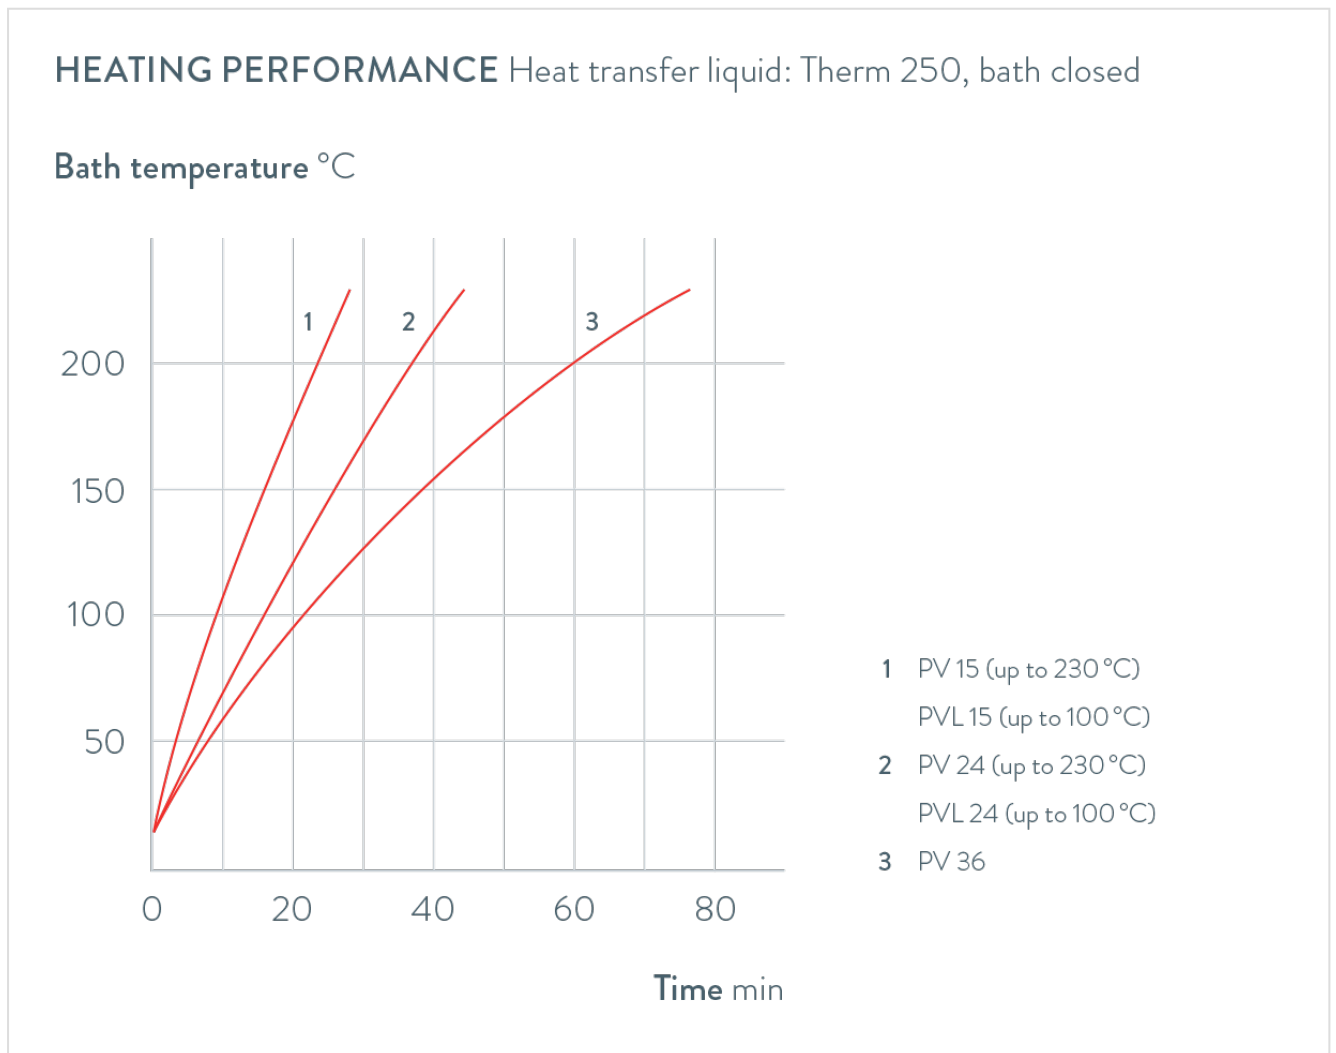

Reserve technical changes

LAUDA DR. R. WOBSEY GMBH & CO. KG  
 Laudaplatz 1 • 97922 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0  
 info@lauda.de • www.lauda.de  
 WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRA 560069


Persönlich haftende Gesellschafterin:  
 LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
 Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRB 560226

Geschäftsführer:  
 Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
 Dr. Marc Stricker  
 Beirat: Dr. Gerhard Wobser

## PRODUCT DATA SHEET

Standing: 2024-11-04

LAUDA Proline PVL 15  
 Clear-view thermostat 115 V; 60 Hz  
 Part Number: L001576

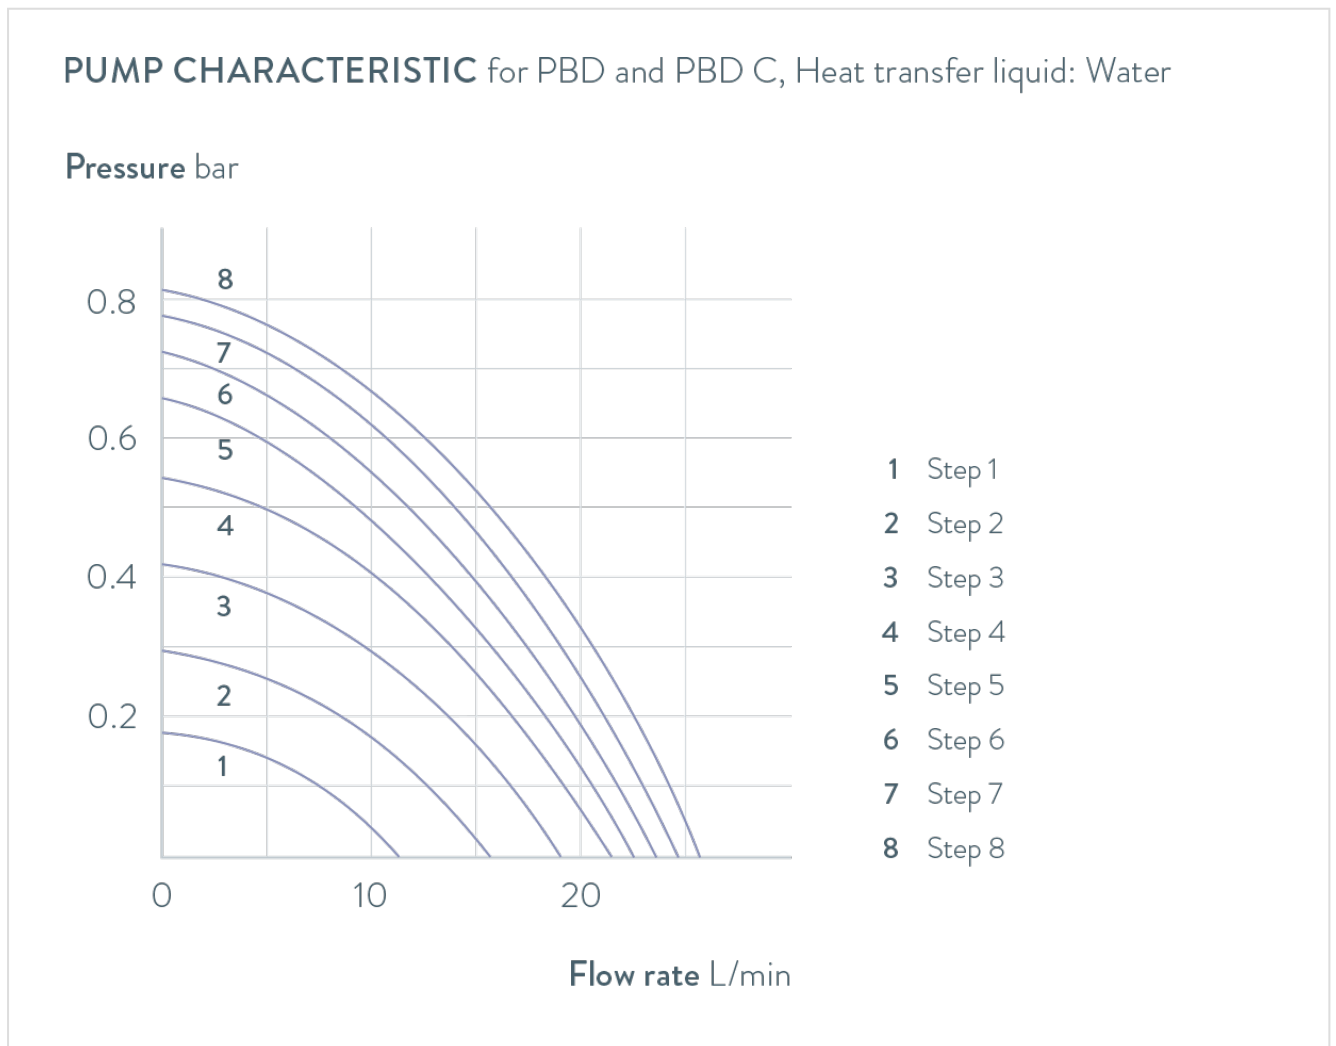

Reserve technical changes

LAUDA DR. R. WOBSEY GMBH & CO. KG  
 Laudaplatz 1 • 97922 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0  
 info@lauda.de • www.lauda.de  
 WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
 LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
 Sitz Lauda-Königshofen  
 Registergericht Mannheim • HRB 560226

Geschäftsführer:  
 Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
 Dr. Marc Stricker  
 Beirat: Dr. Gerhard Wobser